



Nitrile +
Neoprene

Tough chemical protection unparalleled comfort

- Three layer design for superior protection against harsh chemicals including acids, solvents and bases
- Thin mil construction provides enhanced tactility and dexterity
- Extra soft material and ergonomic design for outstanding fit, feel and flexibility for longer wear time
- Lower acceptable pinhole rate (0.65 AQL) and extended cuff for reliable protection against hazardous substances
- Silicone free formulation and processing ensure better product protection




Industries

- Aerospace
- Automotive
- Chemical
- Electronics
- Life Sciences
- Machinery and Equipment
- Metal Fabrication
- Recycling & Waste Disposal

Applications

- Blending, compounding materials
- Handling aerospace equipment & parts
- Handling of painting tools including spray guns and robots
- Handling unexpected leaks, spills or other releases
- Maintenance and equipment clean up
- Mounting & dismantling, assembly
- Petrochemicals processing
- Routine & experimental testing
- Sample taking & lab processing
- Transferring liquid & solids

Innovative 3 Layer Design*

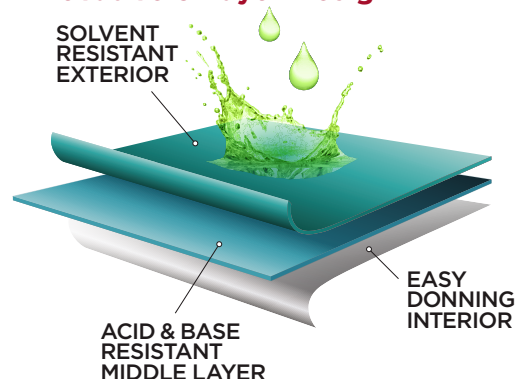

* The method used to produce this 3 layer design is patent pending.

TECHNICAL DATA SHEET:

PRODUCT INFORMATION:

| | 93-260 |
|--|--|
| Material | Nitrile + Neoprene |
| Color | Green exterior, blue interior |
| Glove Design | Ambidextrous, Powder-Free, Textured fingers, Heavy Duty Product |
| Cuff | Beaded |
| Manufacturing/QMS Audit Standards | ISO 9001 |
| Regulatory/Standards Compliance | COMPLIANT WITH ASTM D3577, TYPE II, PPE 89/686, EN 420, 388 & 374 CATEGORY III |
| Packaging | 50 gloves per dispenser box, 10 dispenser boxes in a shipper box |
| Storage | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition. |
| Country of Origin | Sri Lanka |
| User Needs Segment | High Risk Glove – Extended cuff gloves to provide additional protection for the wrist and forearm. |

PHYSICAL PROPERTIES:

| | TYPICAL VALUES | | | | | | TESTING METHOD |
|---|----------------------------|--------------|--------------|--------------|----------------|------------------|--|
| | 5.5 - 6 XS | 6.5 - 7 S | 7.5 - 8 M | 8.5 - 9 L | 9.5 - 10 XL | 10.5 - 11 XXL | |
| Length (mm/inches) | 300 / 11.8 | 300 / 11.8 | 300 / 11.8 | 300 / 11.8 | 300 / 11.8 | 300 / 11.8 | ASTM D3767/EN 420 |
| Average Palm Width | 78 | 89 | 98 | 111 | 116 | 122 | |
| Freedom from Holes (Inspection level I) | 0.65 AQL | | | | | | ASTM D6319-10/ ASTM D5151-06 (2011) |
| Palm Thickness Single Wall | (mm : 0.198) / (mil : 7.8) | | | | | | ASTM D3767/EN 420 |
| | BEFORE AGING | | | AFTER AGING | | | |
| Ultimate Tensile Strength | 22 Mpa | | | 26 Mpa | | | ASTM D6319-10 |
| Elongation at Break (%) | 620 | | | 520 | | | ASTM D6319-10 |
| Force at break (N) | 16 | | | 17 | | | ASTM D6319-10 |

ORDERING INFORMATION:


| | SIZE | 5.5 - 6 XS | 6.5 - 7 S | 7.5 - 8 M | 8.5 - 9 L | 9.5 - 10 XL | 10.5 - 11 XXL |
|--------|-------------|---------------|--------------|--------------|--------------|----------------|------------------|
| 93-260 | REORDER NO. | 93260060 | 93260070 | 93260080 | 93260090 | 93260100 | 93260110 |

For additional information visit us at www.ansell.com, or call us at 1-877-750-6110

Ansell
111 Wood Avenue South
Suite 210
Iselin, NJ 08830
USA

Ansell
105 Lauder
Cowansville, QC J2K 2K8
Canada

Performance Standards



Regulatory Compliance

