

S71 - SOFTGUARD BLUE COVERALL

DIVISION ESP STYLE # S71

CATEGORY NUCLEAR

CUSTOMER DATE 01/21/16

LEVITT

PAGE 1

SIZE | S, M, L, XL, 2XL, 3XL

SAMPLE SIZE

FABRIC INFORMATION
 CONTENT SOFTGUARD BULE - PRECISION FABRICS


FINISH | BLUE

TRIMS INFORMATION

THREAD | A&E - T220 POLYESTER
 THREAD | A&E - T27 PERMA SPUN
 ZIPPER | PAC CANA - A1-3CP 28" 101B POLY PINLOCK WHITE

CONSTRUCTION & STYLE NOTES

SOFTGUARD BLUE DISPOSABLE FR COVERALL, ZIPPER FRONT CLOSURE, LAY DOWN COLLAR, SLEEVE ATTACH TO THE BODY.

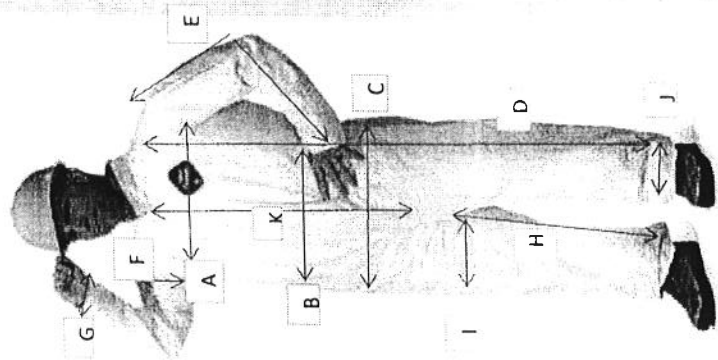

LABEL INFORMATION

LABEL #1 | STAMP
 LABEL #2 | SIZE
 CREST

ARE INSTRUCTIONS

PACKAGING INFORMATION

PACKAGING INFO | 25/CS
 POLYBAG
 CARTON SIZE
 CARTON MARKINGS

REVISION LOG

date:	changes
date:	changes
date:	changes
date:	changes

CHEST	A	LEG OPENING	J
WAIST	B	ZIPPER LENGTH	K
SEAT	C		
LENGTH	D		
SLEEVE LENGTH	E		
WIDTH-BICEP	F		
SLEEVE OPEN WRIST	G		
INSEAM	H		
THIGH	I		



301 North Elm Street
Greensboro, NC 27401
(336) 510 - 8011

SoftGUARD™

WFR – Style 090-78830

Basis Weight:	2.36 oz/sq yard	*WSP 130.1 (05) ASTM D3776M-(09A)
Grab Tensile – MD:	31 lbs	WSP 100.2(05) ASTM D5034 (09)
– XD:	20 lbs	"
Trap Tear – MD:	7 lbs	WSP 100.2 (05) ASTM 5587 (08)
– XD:	11 lbs	"
Mullen Burst:	29 lbs/sq inch	WSP 30.1(08) ASTM D3786M(09)
Vertical Flammability:	Pass Pass	NFPA 701-1989 Small Scale NFPA 701 -2010
Char Length – MD:	4.9 inches	ASTM D6413 (08) (Fed. Test 191A Method 5903.1)
– XD:	4.7 inches	"
Afterflame-(ignition off):	0 seconds	"
Thermal Protective Performance Rating (TPP)	3.8(Spaced)	NFPA 2112(07) Section 8
Surface Resistivity:	4.0 X 10 E7 Ohm's/ sq.cm. Max. (65%RH-22.2C)	WSP 40.1(08)
Spray Rating (Water):	50 minimum	WSP 80.1(05) AATCC Method 22 (05)
Oil Drop Repellency Rating:	4 minimum	WSP 80.7(05) Note: WSP methods=INDA/EDANA