

The TracBloc® self-retracting lifelines are made of a shock absorber and a self-retracting lifeline. They are designed to be used as a connecting device in a personal fall arrest system. The TracBloc® self-retracting lifelines connect the user's harness to the anchorage point. Typical applications are: warehouse use, order-picker, manufacturing, scaffolding, construction, elevated platforms and general maintenance, repairs and operations.

The TracBloc® self-retracting lifeline allow freedom of movement in elevated areas, and eliminates tripping hazards and dangerous falls normally associated with fixed length lifelines. In case of a slip or a fall, an internal locking system immediately activates to arrest the fall.

The self-retracting lifelines have a webbing wound on a spring-loaded drum. They are supplied with a ¾ in. (20 mm) self-locking snap hook at the shock pack end and 2½ in. (64 mm) self-locking snap hooks at each arm. A fall indicator label is sewn on the shock pack.

The new design includes a new housing made of thermoplastic material making it lightweight, robust and resistant to impact, wear, abrasion and ageing. It also has an improved responsive system that, in an event of a fall, allows the breaking system to function quickly (in less than 10 cm [4 in.] drop), thus reducing the distance of the fall. Additionally, the new design is equipped with a new spring system that improves unwinding without sticking (blocking) points during use.

The purpose of the shock absorber is to lower the impact force experienced in a fall by dissipating the kinetic energy and controlling deceleration. The shock-absorbing device is made of a specially woven webbing that elongates through tearing on its weave and stitching. This action limits the impact force to an average arrest force of 900 lb. (400 kg) for the one arm TracBloc® and 1,350 lb. (610 kg) for the two arms TracBloc®2.

The TracBloc®2 has two arms and allows the worker to remain safely connected at all time (100% tie-off) while climbing or on the move.

For further information, refer to the "Use and Maintenance Instructions" for the TracBloc® self-retracting lifeline.

⚠ WARNING

Always select an anchorage point that is capable of upporting a minimum load of 5,000 lb. (22.2 kN).

APPLICATIONS

- Warehouse use
- Order-picker
- Manufacturing
- Scaffolding
- Construction
- Elevated platforms
- General maintenance
- Repairs and operations

APPLICABLE STANDARDS

- CSA Z259.2.2-18, class SRL
- ANSI Z359.14-2014
- OSHA



AVAILABLE MODELS


- **TRACBLOC** 7 ft. (2.1 m) TracBloc® self-retracting lifeline with ¾ in. (20 mm) self-locking snap hook all ends
- **TRACBLOC2** 8 ft. (2.4 m) TracBloc® self-retracting lifeline with two arms, ¾ in. (20 mm) self-locking snap hook at shock pack and 2½ in. (64 mm) self-locking snap hook at both ends

For information on Tractel® connectors, refer to technical sheet T-4536.

⚠ WARNING

When choosing an anchorage point, take into consideration the deceleration distance. The shock absorber can elongate up to 42 in. (1.1 m) as it extends during activation.

Free fall distance should not be greater than 6 ft. (1.8 m). Consult local regulations as permitted free fall distance may be less than 6 ft. (1.8 m).

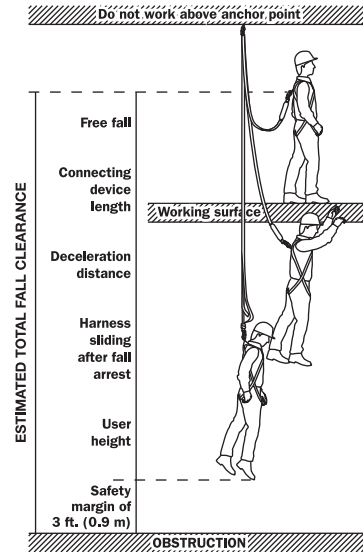

PARTS	SPECIFICATIONS
SRL HOUSING	Thermoplastic with internal steel components and non-corrosive components
LIFELINE WEBBING	Polyester Width: ¾ in. (20 mm) Thickness: ⅛ in. (1.6 mm) Tensile strength: 4,500 lb. (20 kN) Elongation @ 2,500 lb. (11.1 kN): 3.58% max. for dry condition and 5.43% for wet condition
TEAR WEBBING FOR THE TRACBLOC®	Single wing natural polyester Width: 1.95 in. (50 mm)
TEAR WEBBING FOR THE TRACBLOC®2	Double wing natural polyester Width: 1.38 in. (35 mm)
SHOCK ABSORBER PROTECTIVE COVER	High tenacity polyester Width: 3⅝ in. (85 mm) Tubular construction
STITCHING	Lanyard is lock-stitched. Thread: #138 polyester
¾ IN. (20 MM) SELF-LOCKING SNAP HOOK (43601 – Z HOOK)	Plating: zinc dichromate Proof-loaded 100% at 3,600 lb. (16 kN) Tensile strength: 5,000 lb. (22.2 kN) Gate strength: side and face 3,600 lb. (16 kN)
2½ IN. (64 MM) SELF-LOCKING SNAP HOOK (43618 – Y HOOK)	Polished aluminium Proof-loaded 100% at 3,600 lb. (16 kN) Tensile strength: 5,000 lb. (22.2 kN) Gate strength: side and face 3,600 lb. (16 kN)
CAPACITY	310 lb. (140 kg), one person

Specifications are subject to change without notice. Images are for illustrative purposes only.