

# V-TEC™ Mini Personal Fall Limiter

Impressive Innovation in a Compact Size



## Compact and Versatile

The V-TEC Mini PFL is the most compact and lightweight self retracting lanyard ever developed using radial energy-absorbing technology. The compact design eliminates the need for an exposed external energy-absorber outside of the housing, which improves wear and tear performance and decreases the replacement cycle, saving you money. Unit offers fall arrest and restraint for users 130 to 400 lbs. (60 to 181 kg) including tools.

## Strong and Tested

The V-TEC Mini PFL has a highly durable polycarbonate, clear casing, allowing for easy pre-use inspection of critical internal components. Unit can withstand temperatures ranging from -40° to +130° F (-40° to +54° C). The V-TEC Mini PFL has been tested to these relevant standards:

- ANSI Z359.14, Class B
- OSHA 1910.66
- OSHA 1926.502
- CSA Z259.2.2-98
- EN360: 2002

WE KNOW WHAT'S AT STAKE.

# V-TEC Mini PFL



## Assured Safety

The world's first self retracting lifeline with multiple spring radial energy-absorbing technology

- Integral energy absorber
- Energy absorber is completely sealed from external contaminants



## Free range of motion

Fully rotating attachment point for complete flexibility—both 360° and 180°



## Highly durable

Polycarbonate case houses SRL; transparency allows for easy visual inspection of critical internal components




## Precision engineering

Structurally reinforced pawl mechanism




## Superior materials


Components manufactured from high-grade stainless steel and engineered plastics

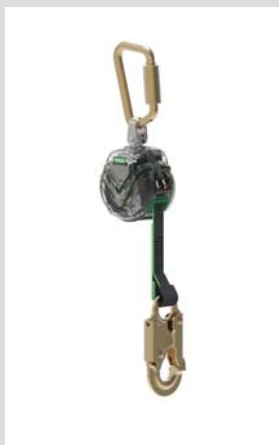


Single-leg

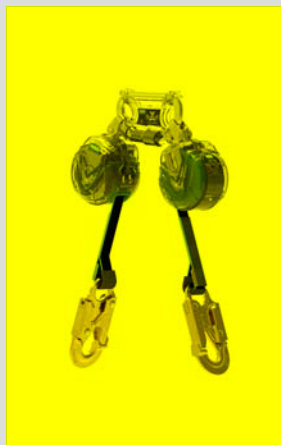

Twin-leg

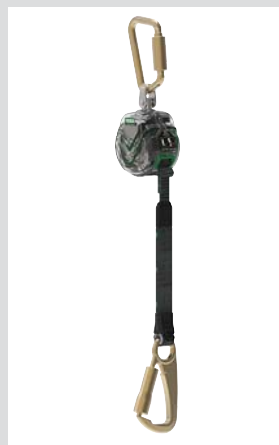


Single-leg Tie-back

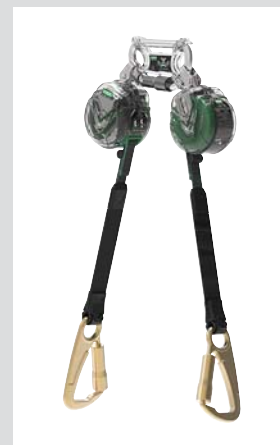

Twin-leg Tie-back


# Available Connectors

V-TEC Mini PFL offers choice of steel or aluminum top carabiner and variety of available connectors.

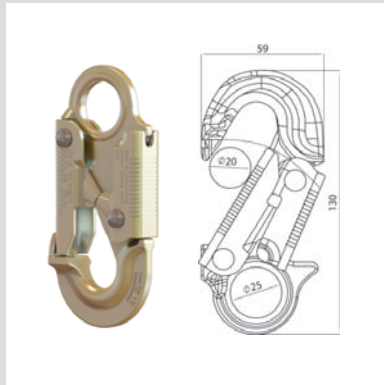


### Forged Steel Snaphook (36C)

- Double-action/self-locking gate
- High-tensile steel material
- Zinc-plated finish
- EN-, ANSI- and CSA-compliant

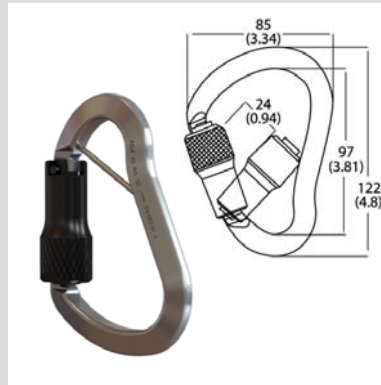

### Carabiner/Hook

- Triple-locking gate
- Aluminum alloy
- EN-, ANSI- and CSA-compliant

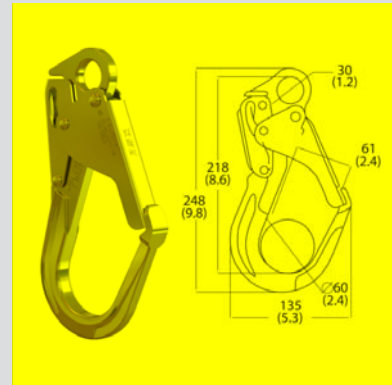


### Aluminum Scaffold Hook (AL36CL)

- Aluminum alloy
- EN-, ANSI- and CSA-compliant



### Forged Steel Swivel Snaphook (36CS)

- Double-action/self-locking gate
- High-tensile steel material
- Zinc-plated finish
- ANSI-, CSA- and EN-compliant

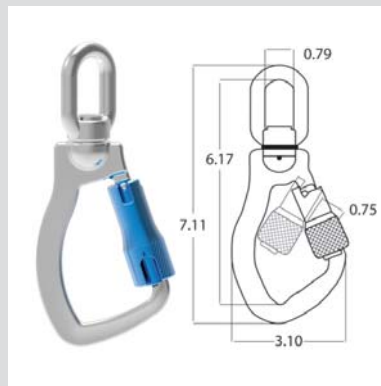

### Swivel Carabiner/Hook

- Triple-locking gate
- Aluminum alloy
- ANSI-, CSA- and EN-compliant



### Steel Scaffold Hook (36CL)


- High-tensile steel material
- Zinc-plated finish
- ANSI-, CSA- and EN-compliant

## Ordering Information

Part Number	Type			Line Length	Anchorage Connection	Harness Connection	Standards		
	Single-leg	Twin-leg	Tie-back				OSHA	ANSI	CSA
63011-00A	■			6 ft. (1.8 m)	AL36CL	Steel carabiner	■	■	■
63011-00B	■			6 ft. (1.8 m)	36C	Steel carabiner	■	■	■
63011-00C	■			6 ft. (1.8 m)	Aluminum swivel carabiner	Steel carabiner	■	■	■
63011-00D	■			6 ft. (1.8 m)	Aluminum carabiner	Steel carabiner	■	■	■
63011-00E	■			6 ft. (1.8 m)	36CS	Steel carabiner	■	■	■
63011-00F	■			6 ft. (1.8 m)	36CL	Steel carabiner	■	■	■
<b>63111-00A</b>		■		6 ft. (1.8 m)	<b>AL36CL (2)</b>	<b>Twin-Link Connector</b>	■	■	■
63111-00B		■		6 ft. (1.8 m)	36C (2)	Twin-Link Connector	■	■	■
63111-00C		■		6 ft. (1.8 m)	Aluminum swivel carabiner (2)	Twin-Link Connector	■	■	■
63111-00D		■		6 ft. (1.8 m)	Aluminum triple-lock carabiner (2)	Twin-Link Connector	■	■	■
63111-00E		■		6 ft. (1.8 m)	36CS (2)	Twin-Link Connector	■	■	■
63111-00F		■		6 ft. (1.8 m)	36CL (2)	Twin-Link Connector	■	■	■
63041-00A			■	9 ft. (2.7 m)	FP5K	Steel carabiner	■		
63141-00A			■	9 ft. (2.7 m)	FP5K (2)	Twin-Link Connector	■		
63041-00ACA			■	9 ft. (2.7 m)	FP5K	Steel carabiner			■
63141-00ACA			■	9 ft. (2.7 m)	FP5K (2)	Twin-Link Connector			■

### V-TEC Mini Twin-Link Connector

Part Number	Description
63900-04	Twin-Link Connector for V-TEC PFL

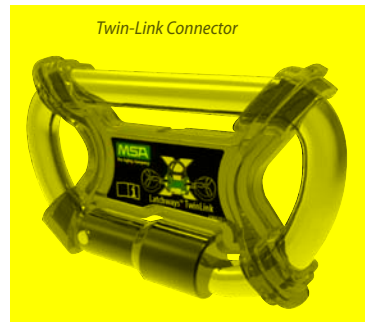

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



#### MSA – The Safety Company

1000 Cranberry Woods Drive  
Cranberry Township, PA 16066 USA  
Phone 724-776-8600

[www.MSAsafety.com](http://www.MSAsafety.com)

#### U.S. Customer Service Center

Phone 1-800-MSA-2222  
Fax 1-800-967-0398

#### MSA Canada

Phone 1-800-672-2222  
Fax 1-800-967-0398

#### MSA Mexico

Phone 01 800 672 7222

ID 4600-008-MC / March 2018

© MSA 2018 Printed in U.S.A.